



CCT Tunable Recessed down Light Series

Round CCT Tunable Recessed down Light

DESCRIPTION

A flexible, low cost downlight solution for recessed can LED retrofit applications. It can be installed virtually anywhere, provides true color rendering with 90+ CRI, and can be continuously dimmed to 10% with standard dimmers. Ideal for healthcare, property management, hospitality, residential, office, retail, etc.



TECHNICAL SPECIFICATION

VOLTAGE	120V
POWER FREQUENCY	60Hz
POWER FACTOR	>0.9
5 CCT	2700K 3000K 3500K 4000K 5000K
CRI	90
BEAM ANGLE	106°-111°
LIFESPAN	≥50,000hours
DIMMING	Triac Dimming
RATING	Suitable for wet location
WORKING TEMP	-20°-40°C
FINISH	White/Black/Bronze
WARRANTY	5 years limited


Specification data

Model No.	Size (in)	Wattage (w)	Lumens (lm)	Beam Angle
D834-CCT-90	4"	10W	650lms	106°
D836-CCT-90	6"	15W	1000lms	111°
D834-CCT-N-90	4"	10W	650lms	106°
D836-CCT-N-90	6"	15W	1000lms	111°

DIMMABLE

Compatible with most LED dimmers to give you a smooth, 100%-10% dimming experience, so you can choose the right brightness for you. Please check the dimmer list for compatible models of dimmers!

CHANGE COLOR TEMPERATURE WITH THE SIMPLE FLIP OF A SWITCH

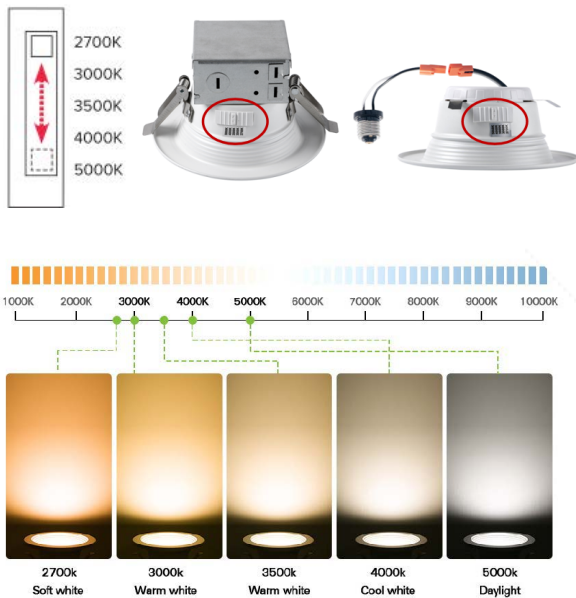

NO.	Lutron	Y/N	NO.	Leviton	Y/N
1	S-603P	Y	18	6674	Y
2	S-600P	Y	19	6633-P	Y
3	4X603	Y	20	6683	Y
4	DVCL-153P-WH	Y	21	6672	Y
5	CTCL-153PDH-WH	Y	22	6631	Y
6	SLV-600P-WH	Y	23	IPL06	Y
7	DV-600P	Y	24	DB33K1	Y
8	CT-603PGH-WH	Y	25	1F4205	Y
9	MACL-153M-WH	Y	26	1A2305	Y
10	DVLV-603P-IV	Y	27	1E1205	N
11	DVW-603PGH-WH	Y	28	VP106	N
12	NT-1000	N			
13	MALV-600	N			
14	MIR-600THW-WH	N			
15	S-600PR-WH	N			
16	SPSLV-600-WH	N			
17	MALV-600-IV	N			

LISTING


UL Listed. Energy Star.




CCT Tunable Recessed down Light Series

Round CCT Tunable Recessed down Light

Size & Dimension

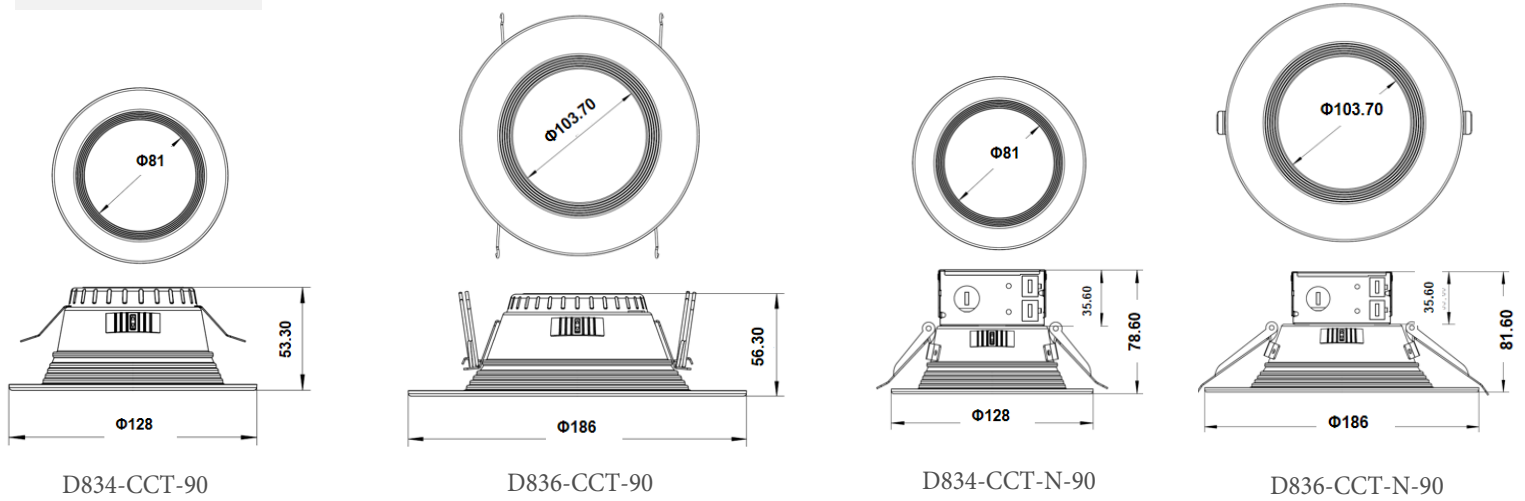

Installation 1

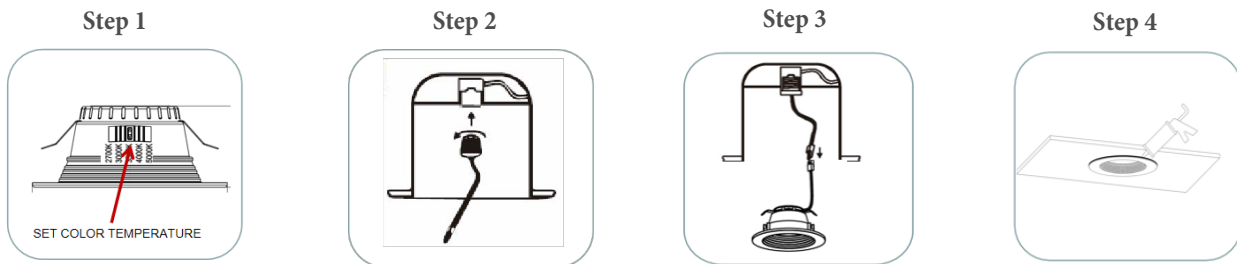

Installation 2

