



Slim Panel Series

Square Slim Panel downlights with J-box

DESCRIPTION


Ultra-thin LED recessed ceiling light, high brightness. Only requires 2 inches clearance of ceiling space, perfect solution for your narrow ceiling that doesn't fit for a can. making this light perfect for remodeling, or new construction installations. It can be installed in various locations like Kitchen, Bathroom, Basement, Living Room, Home Office, Hallway, provides true color rendering with 90+ CRI, and can be continuously dimmed to 10% with standard dimmers.



Performance Information

VOLAGE	120V
POWER FREQUENCY	60Hz
POWER FACTOR	>0.9
5CCT	2700K 3000K 3500K 4000K 5000K
CRI	90
BEAM ANGLE	110°
LIFE SPAN	≥50,000hours
DIMMING	Triac Dimming
RATING	Suitable for wet locations
WORKING TEMP	-20°-40°C
FINISH	White/Black/Bronze/Nickel
WARRANTY	5 years

CHANGE COLOR TEMPERATURE WITH THE SIMPLE FLIP OF A SWITCH

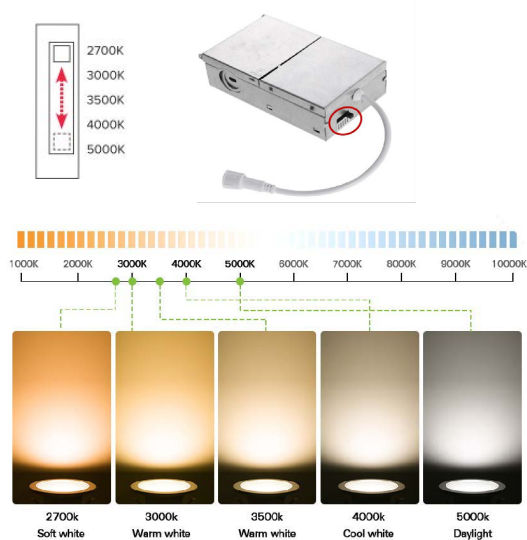

Specification data

Model No.	Size (in)	Wattage (w)	Lumens (lm)
D903-CCT-S-90	3"	6W	420lms
D904-CCT-S-90	4"	12W	750lms
D906-CCT-S-90	6"	15W	1050lms
D908-CCT-S-90	8"	20W	1550lms
D912-CCT-S-90	12"	24W	1900lms

DIMMABLE

Compatible with most LED dimmers to give you a smooth, 100%-10% dimming experience, so you can choose the right brightness for you. Please check the dimmer list for compatible models of dimmers!

NO.	Lutron
1	NT-1000
2	S-603P
3	S-600P
4	CTCL-153P
6	DVW-603PGH-WH
7	4X603
8	DVCL-163P-WH
9	CTCL-153PDH-WH
10	SLV-600P-WH
12	DV-600P
13	CT-603PGH-WH
16	MIR-600THW-WH
17	MACL-153M-WH
18	S-600PR-WH


NO.	Leviton
1	6674
2	6633-P
3	6683
4	6672
5	IPL06
6	VP106
7	DB33K1
8	1F4205
9	1A2305

LISTING

UL Listed. Energy Star.



Size & Dimension

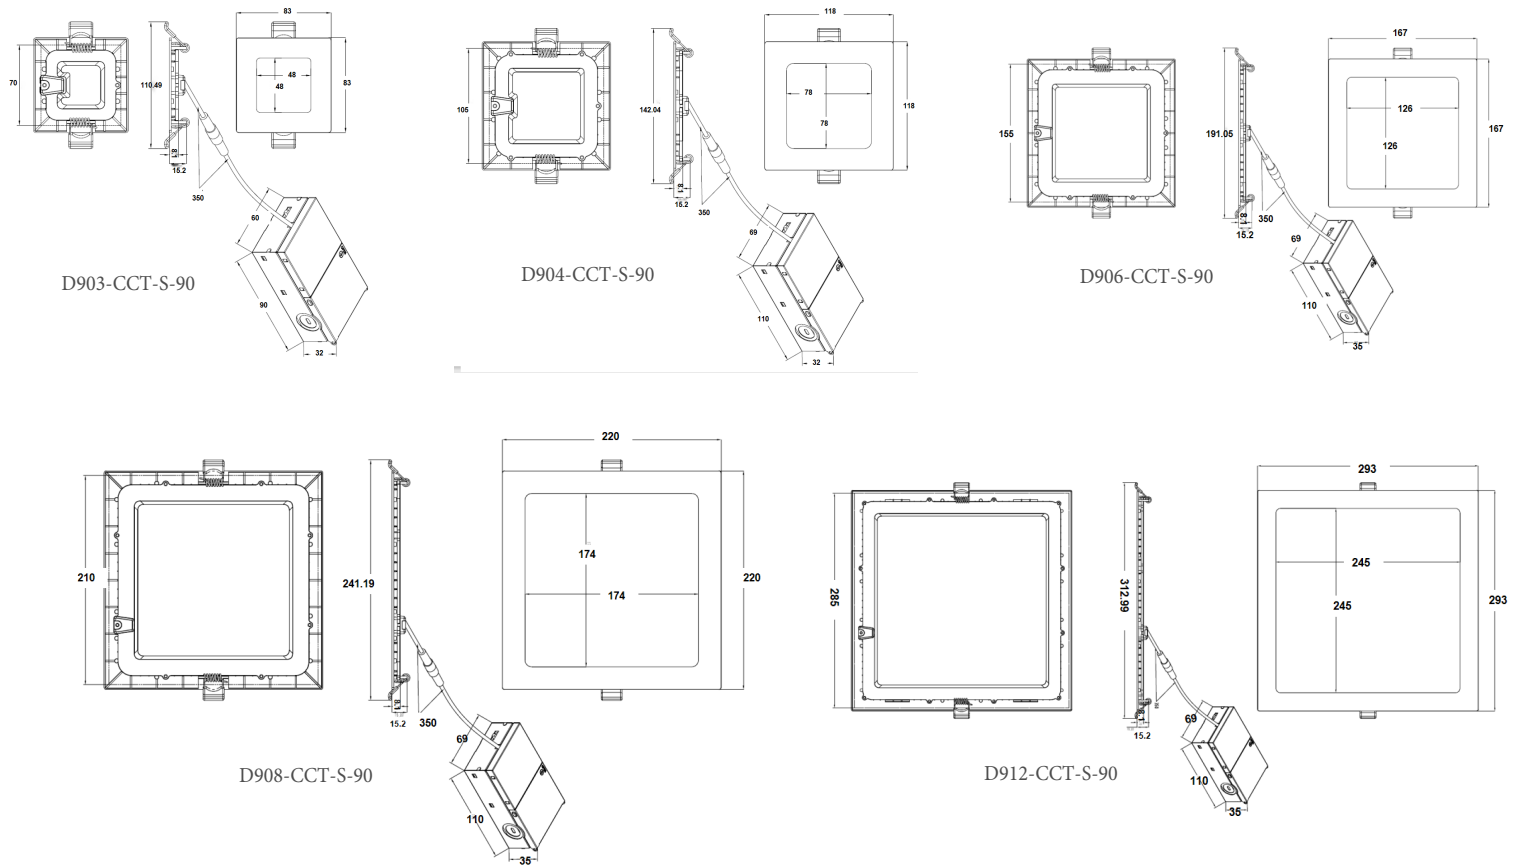


Easy installation

1




Cut a hole in the ceiling

2



Wire the electrical supply cable to J-box cable

3



Connect downlight to J-box and select a color temperature.

4



Push spring clips up and insert downlight into the hole.